
| Grounding Busbar | |
|------------------|---------------------|
| Part Number | Bar Size |
| GB2612 | 1/4" X 2" X 12" |
| GB3812 | 1/4" X 3" X 12" |
| GB41012 | 1/4" X 4" X 12" |
| GB51212 | 1/4" X 5" X 12" |
| GB61512 | 1/4" X 6" X 12" |
| GB31512 | (2) 1/4" X 3" X 12" |
| GB42012 | (2) 1/4" X 4" X 12" |

| Individual Items | |
|--------------------------|------|
| 1-3/8" Insulator (Standa | ird) |
| 2.0" Insulator | |
| 12G "Hat" Bracket | |



Standard busbar assemblies are insulated and specifically designed for commercial applications. The silver washed 110 alloy copper ground bars are 1/4" thick and stand off 2.625" from the wall or backboard.

Quantity and size of holes is optional. Any arrangement can be accommodated. We'll fabricate to your requirements. Same day shipment available.

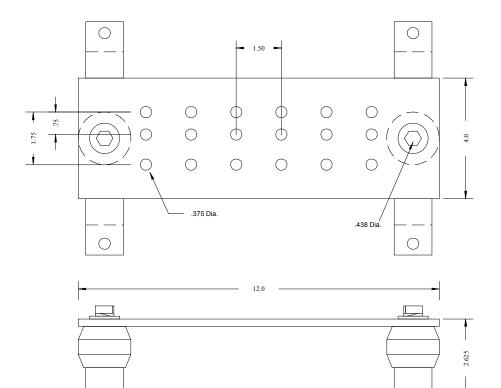